

sodastream

PROFESSIONAL™



Changing the way people drink water

SodaStream Professional dispenses still and sparkling nano-filtered water in a variety of flavors. Through the SodaStream Connect app and linked bottle, consumers can automatically track their hydration, calculate the number of single use plastic bottles they've saved, and store their preferences.

PERSONALIZATION

Customize temperature, carbonation level, and flavor intensity

HYDRATION TRACKING

Seamlessly show progress against individual daily hydration goals

SUSTAINABILITY

Display how many single use plastic bottles have been saved

FEATURES

QUALITY WATER

Nano filtration with extra cold option

CHOICE & CUSTOMIZATION

Six unsweetened flavors; ability to select temperature, carbonation level, flavor intensity

FRICITIONLESS CONVENIENCE

Dispenser QR Code reader provides simple sign-in via reusable bottle, sticker, or the SodaStream Connect app to automatically display user preferences and track progress

CONTACTLESS POUR FEATURE

Option to dispense customized drinks with intelligent, touch-free experience

DRAIN FREE OPTION

Allows for streamlined installation and optimal placement. Requires periodic emptying of removeable drip tray

ELEVATED DESIGN

Premium look and feel fits into any environment; dynamic lighting creates a welcoming experience

FLEXIBLE PAYMENT OPTIONS

Pay per pour via optional credit card reader; ability to implement subscriptions

EFFICIENT OPERATIONS



All-in-one dispenser

SMART MAINTENANCE

Internal diagnostic system and portal shows alerts and enables proactive service

CLOUD CONNECTIVITY VIA CELLULAR

No need for local WiFi access; Updates can be sent over the air

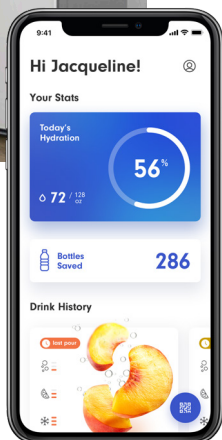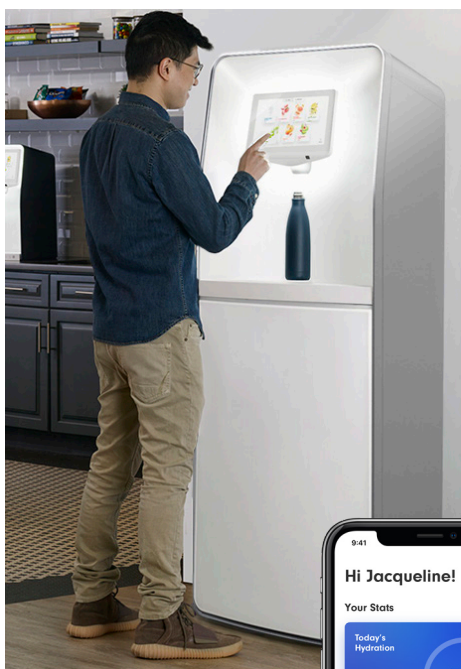


UL/ANSI 471 • NSF/ANSI 18



ADA FEATURES

Design includes features aligned with ADA/508 US Standards

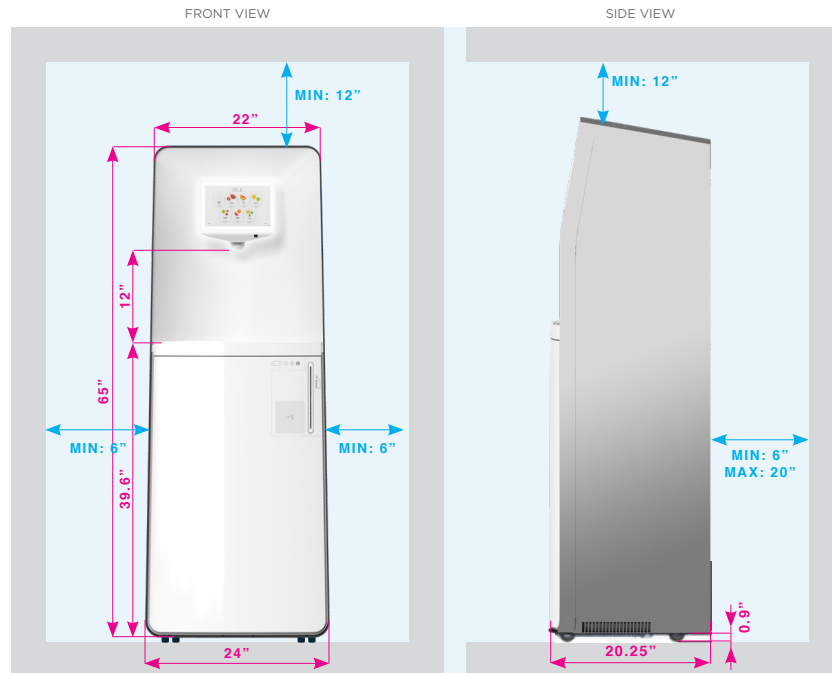

TECHNICAL CHARACTERISTICS

STANDALONE UNIT

Drink Capacity.....	960 oz/hr, 28.4 L/hr
Water valves	3
Flavor (with peristaltic pumps)	6
Casing	sheet metal
Display	10.1" TFT LCD
Power supply	115 V ~ 60 Hz
Power cord length	(3 m) 118"
Height	(1659 mm) 65"
Width	(614 mm) 24"
Depth	(514 mm) 20"
Amp draw	9A
Water connection size	(Ø19.5 mm) I.D. 3/8"
Cup clearance	12"
Net weight	(- 115 kg) 253 lb
Shipping weight	(- 133 kg) 293 lb
Carton volume	(0.98 yd ³) 0.76 m³
Tank capacity (water bath).....	(22 L) 6 US GAL
Compressor cooling capacity	486 W
Refrigerant	(R290 - 110g) 3.88 oz.
Carbonation pump	80 US GPH (290 l/h) @ 60 Hz
Carbonation pump motor	380 W
Carbonator volume	1800 cc
Transformer	150 W
Coil material	AISI 304
CO2 Max Cylinder size	20lb

REQUIREMENTS

STANDALONE UNIT

The dispenser must be placed on a stable surface that is able to support the weight of the equipment including water. Positioning must ensure adequate ventilation in compliance with the clearance distances shown in the above image.

Cell phone reception of 3 or more bars is required for proper functionality

Water Inlet **45-80 psig at 1gpm**
Electrical....**110V/60hz, 15amp GFCI dedicated circuit**

DRAIN UNIT OPTION - SPECIFICS

Drain size (Ø120xØe27 mm) **I.D. 0.79" x O.D. 1.06"**
Drain **¾" pipe with air gap**

